



# Datasheet TX2720 U8



## High Performance Global RAIN RFID Inlay for Enhanced Item Performance

Hana's comprehensive RAIN RFID (UHF) inlay program is tailored for use in applications across various industries, such as apparel/retail, agriculture and food production, and supply chain/logistics.

Offered in a wide range of delivery formats, our inlays are ideal for numerous applications demanding exceptional performance.

### Applications

- Supply Chain Automation
- Inventory Management

### Industry Segments

- Supply Chain & Logistics
- Retail
- Governmental
- Hospitality

### Overview

Antenna Size	26,98 x 19,95 mm (1.063 x 0.781")
IC	NXP UCODE8
EPC Memory	128-bit
User Memory	-
TID Memory	96-bit
Frequency Band	UHF 860 - 960 MHz
Protocol	EPC Global Gen 2v2 ISO/IEC 180000-63 Type C
Delivery Formats	Dry Inlay, Wet White Paperface, Wet Clear

### Quality & Certification


ARC Certified	N/a
Inspection	100% Tested
RoHS	EU Directive 211/65/EU and 2015/863 compliant

# Technical Overview


	Dry Inlay	Wet White Paperface	Wet Clear
Product Code	TX2720A43U8	TX2720AU8-WW	TX2720AU8-WC
Antenna/tag Size	26,98 x 19,95 mm 1.063 x 0.781"	29,95 x 22,95 mm 1.172 x 0.91"	29,95 x 22,95 mm 1.172 x 0.91"
Web Width	43 mm 1.692"	34,925 mm 1.375"	34,925 mm 1.375"
Pitch	25,4 mm 1"	24,4 mm 1"	24,4 mm 1"
Inlays per Roll	13.000	12.000	16.000
Antenna Material	Aluminium	Aluminium	Aluminium
Inlay Substrate	50um PETm 9UM Al	50um PETm 9UM Al	50um PETm 9UM Al
Facesheet Properties	N/a	40# Thermal Transfer Paper	50um PET
Adhesive Properties	N/a	Acrylic Permanent	Acrylic Permanent
Operating Temperatures	-40 to 85°C -40 to 185°F	-40 to 85°C -40 to 185°F	-40 to 85°C -40 to 185°F
Adhesive Application	N/a	-4°C 25°F	-4°C 25°F
Adhesive Service Temperature (range)	N/a	-59 to 93°C -75 to 200°F	-59 to 93°C -75 to 200°F



## Read Range

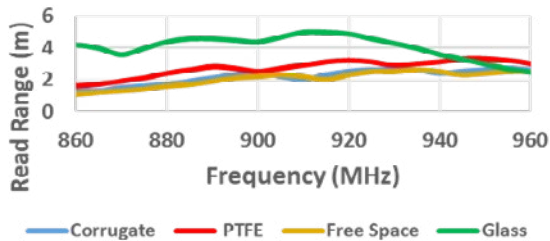

## Orientation Sensitivity

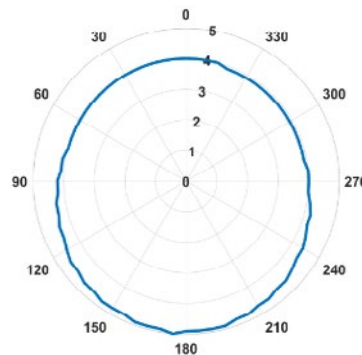

©2025 Hana Technologies, Inc. (Hana) All rights reserved. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Hana's UHF Labels standard terms and conditions. RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the requirements. Hana Technologies, Inc. does not represent that this product is fit for any particular purpose or use. The information contained herein is believed to be reliable but Hana Technologies, Inc. makes no representation concerning the accuracy or correctness of the data.

## Hana RFID

29000 Aurora Rd  
Solon, OH, 44139  
United States

+1 330 405 4600  
sales@hana-rfid.com  
www.hana-rfid.com

