



Datasheet TX9319 M750



High Performance Global RAIN RFID Inlay for Enhanced Item Performance

Hana's comprehensive RAIN RFID (UHF) inlay program is tailored for use in applications across various industries, such as apparel/retail, agriculture and food production, and supply chain/logistics.

Offered in a wide range of delivery formats, our inlays are ideal for numerous applications demanding exceptional performance.

Applications

- Asset Management
- Inventory Management
- Supply Chain Automation
- Product Authentication

Industry Segments

- Agriculture & Food Production
- Automotive
- (Industrial) Manufacturing
- Supply Chain & Logistics

Overview

Antenna Size	93 x 19 mm (3.656 x 0.75")
IC	Impinj M750
EPC Memory	96-bit
User Memory	32-bit
TID Memory	96-bit
Frequency Band	UHF 860 - 960 MHz
Protocol	EPC Global Gen 2v2 ISO/IEC 18000-63 Type C
Delivery Formats	Dry Inlay, Wide Web, Wet White Paperface


Quality & Certification

ARC Certified	-
Inspection	100% Tested
RoHS	EU Directive 211/65/EU and 2015/863 compliant


Technical Overview

	Dry Inlay	Dry Wide Web	Wet White Paperface
Product Code	TX9319AM750	TX9319A108M750	TX9319AM750-WW
Antenna/tag Size	93 x 19 mm 3.656 x 0.75"	93 x 19 mm 3.656 x 0.75"	96 x 23 mm 3.781 x 0.906"
Web Width	96,5 mm 3.799"	108 mm 4.252"	104,775 mm 4.125"
Pitch	24,4 mm 1"	24,4 mm 1"	25,4 mm 1"
Inlays per Roll	30.000	30.000	11.000
Antenna Material	Aluminium	Aluminium	Aluminium
Inlay Substrate	50um PETm 9UM Al	50um PETm 9UM Al	50um PETm 9UM Al
Facesheet Properties	N/a	N/a	40# Thermal Transfer Paper
Adhesive Properties	N/a	N/a	Acrylic Permanent
Operating Temperatures	-40 to 85°C -40 to 185°F	-40 to 85°C -40 to 185°F	-40 to 85°C -40 to 185°F
Adhesive Application	N/a	N/a	-4°C 25°F
Adhesive Service Temperature (range)	N/a	N/a	-59 to 93°C -75 to 200°F

Read Range

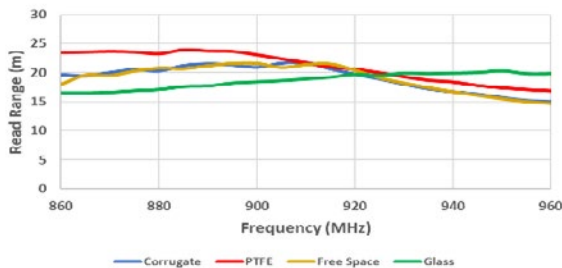

Orientation Sensitivity

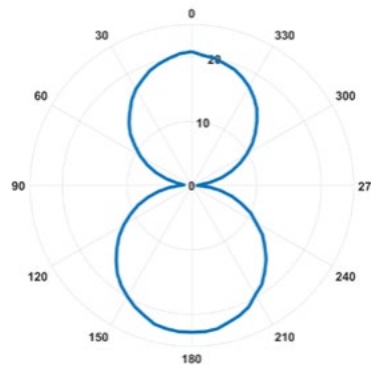

©2025 Hana Technologies, Inc. (Hana) All rights reserved. Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

Warranty: Please refer to Hana's UHF Labels standard terms and conditions. RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.

Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the requirements. Hana Technologies, Inc. does not represent that this product is fit for any particular purpose or use. The information contained herein is believed to be reliable but Hana Technologies, Inc. makes no representation concerning the accuracy or correctness of the data.

Hana RFID

29000 Aurora Rd
Solon, OH, 44139
United States

+1 330 405 4600
sales@hana-rfid.com
www.hana-rfid.com

